



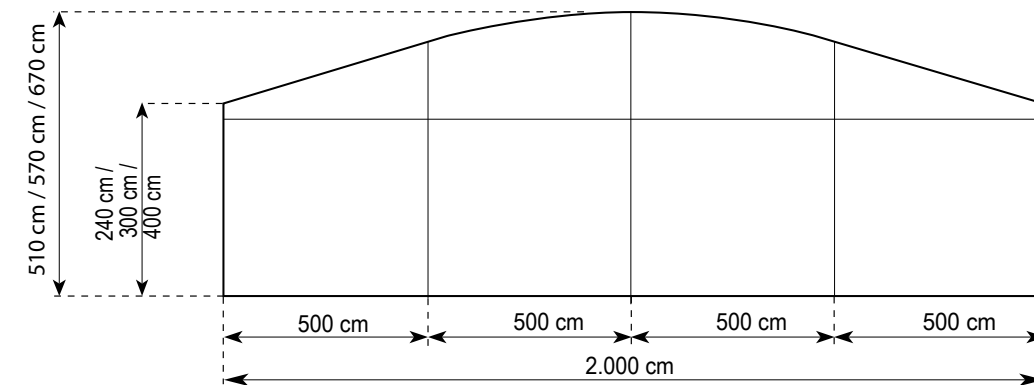

TECHNICAL DATA

STANDARD VERSION

Span	1.500 cm	1.500 cm	2.000 cm	2.000 cm	2.000 cm
Side height	240 cm	300 cm	240 cm	300 cm	400 cm
Ridge height	340 cm	400 cm	510 cm	570 cm	670 cm
Roof pitch	25°	25°	25°	25°	25°
Bay distance / grid	500 cm	500 cm	500 cm	500 cm	500 cm
Longest component	800 cm	800 cm	1.070 cm	1.070 cm	1.070 cm
Min. setup length	2.000 cm	2.000 cm	2.000 cm	2.000 cm	2.000 cm
Main profile	220 x 100 x 3 mm	220 x 100 x 3 mm	220 x 100 x 3/4 mm	220 x 100 x 3/4 mm	220 x 100 x 3/4 mm
Gable column	2	2	3	3	3
Max. setup length	Expandable with the grid				
Max. wind speed according to EN	100 km/h				
Special version	Elimination of the side bandage through the installation of portals				
Flooring	<ul style="list-style-type: none"> · Wood floor with timber or steel-aluminum substructure · Cassette flooring · Heavy duty floor 				
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204				

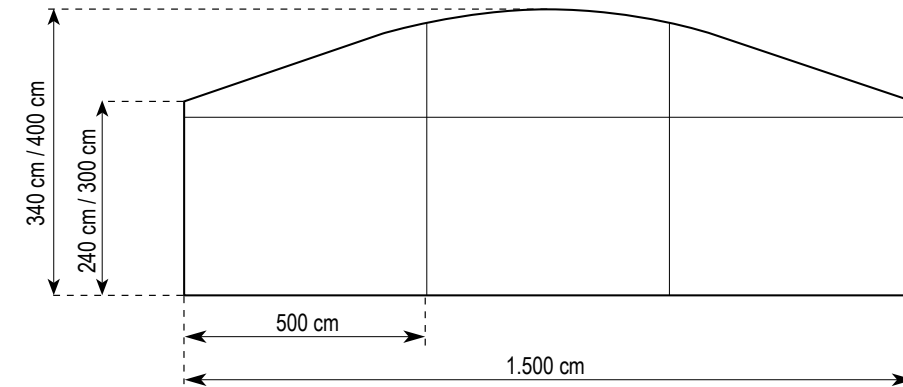

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for you needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.