



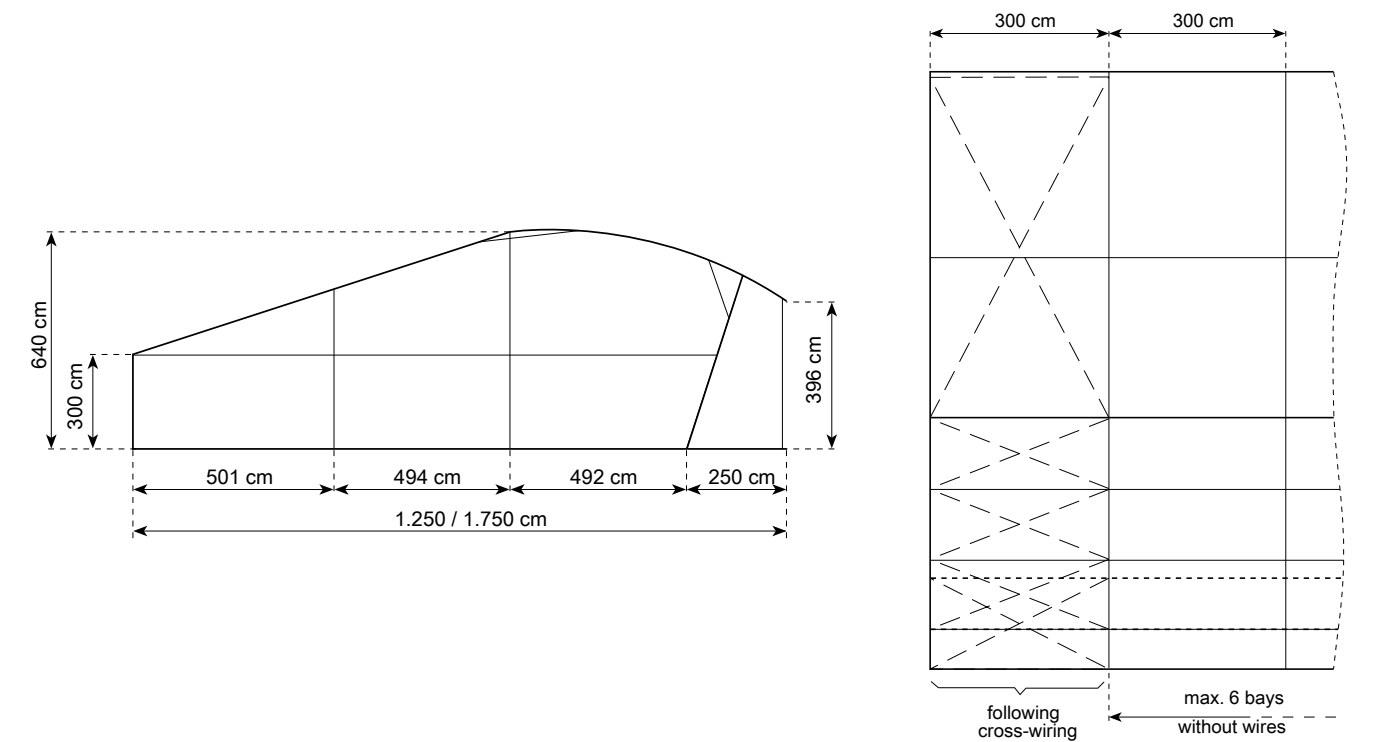

TECHNICAL DATA

STANDARD VERSION

Span	400 cm	500 cm	1.250 cm	1.750 cm
Side height	230 cm	240 cm	300 cm	300 cm
Ridge height	373 cm	395 cm	640 cm	640 cm
Roof pitch	20°	25°	18°	18°
Bay distance / grid	300 cm	500 cm	300 cm	300 cm
Longest component	410 cm	540 cm	820 cm	820 cm
Main profile	94 x 48 x 3 mm	130 x 70 x 3 mm	220 x 100 x 3 mm	220 x 100 x 3 mm
Min. setup length	300 cm	500 cm	1.200 cm	1.200 cm
Corner connections	Stem bolts	Stem bolts	Sliding connection	Sliding connection
Max. setup length	Expandable with the grid			
Max. windspeed according to EN	100 km/h			
Floor	<ul style="list-style-type: none"> · Wooden floor · Heavy-duty fbor · Compact floor 			
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204			

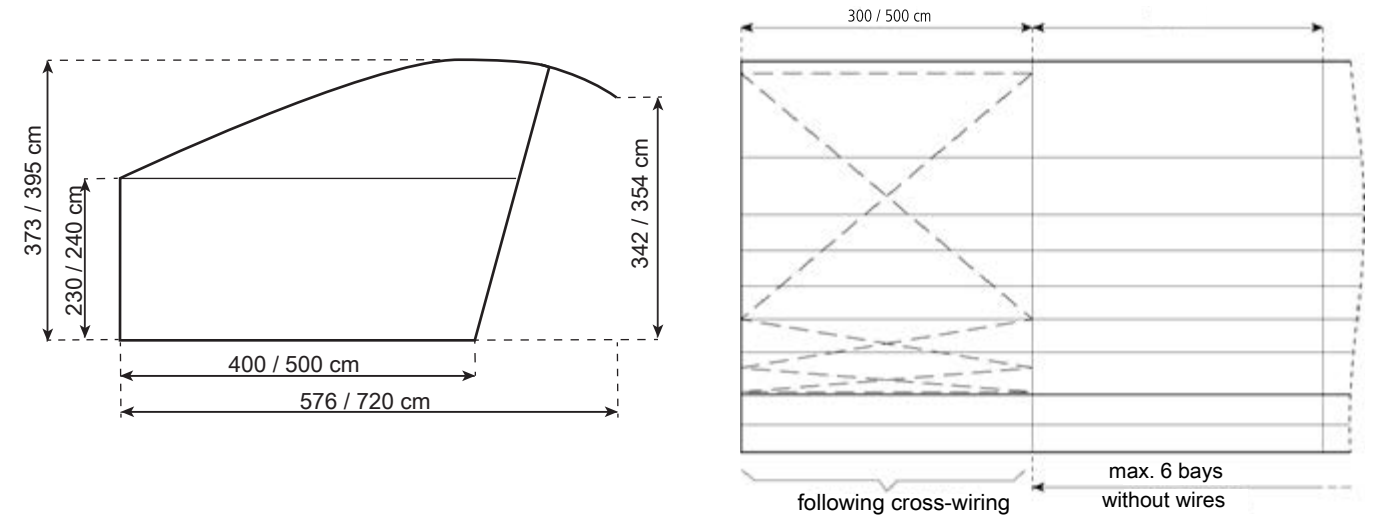

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.