

PARTY TENT 300 - 800 CM




TECHNICAL DATA

STANDARD VERSION


Span	300 cm	400 cm	600 cm	800 cm
Side height	229 cm	229 cm	229 cm	229 cm
Ridge height	284 cm	301 cm	338 cm	374 cm
Roof pitch	20°	20°	20°	20°
Bay distance / grid	300 cm	300 cm	300 cm	300 cm
Longest component	350 cm	430 cm	350 cm	430 cm
Min. setup length	600 cm	600 cm	600 cm	600 cm
	1.200 cm with portals	1.200 cm with portals	1.200 cm with portals	1.200 cm with portals
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm
Gable column	0	0	1	1
Corner connections	Stem bolts	Stem bolts	Stem bolts	Stem bolts

Max. setup length	Expandable with the grid
Max. wind speed according to EN	80 km/h
Special version	<ul style="list-style-type: none"> · Elimination of anchoring by the installation of a steel-aluminum floor with ballast or use of the compact floor or of the use of the cassette floor with ballast · Elimination of wind cross-wiring by installation of portals
Further extension possibilities	<ul style="list-style-type: none"> · Hexagonal with intermediate fields on both sides · Tents of Mega series
Flooring	<ul style="list-style-type: none"> · Wood floor with timber or steel-aluminum substructure · Cassette floor · Compact floor
Tarpaulin	RÖDER No. 1, PVDF-coated tarpaulin, according to DIN 18204

PARTY TENT 300/229/284 & 400/229/301

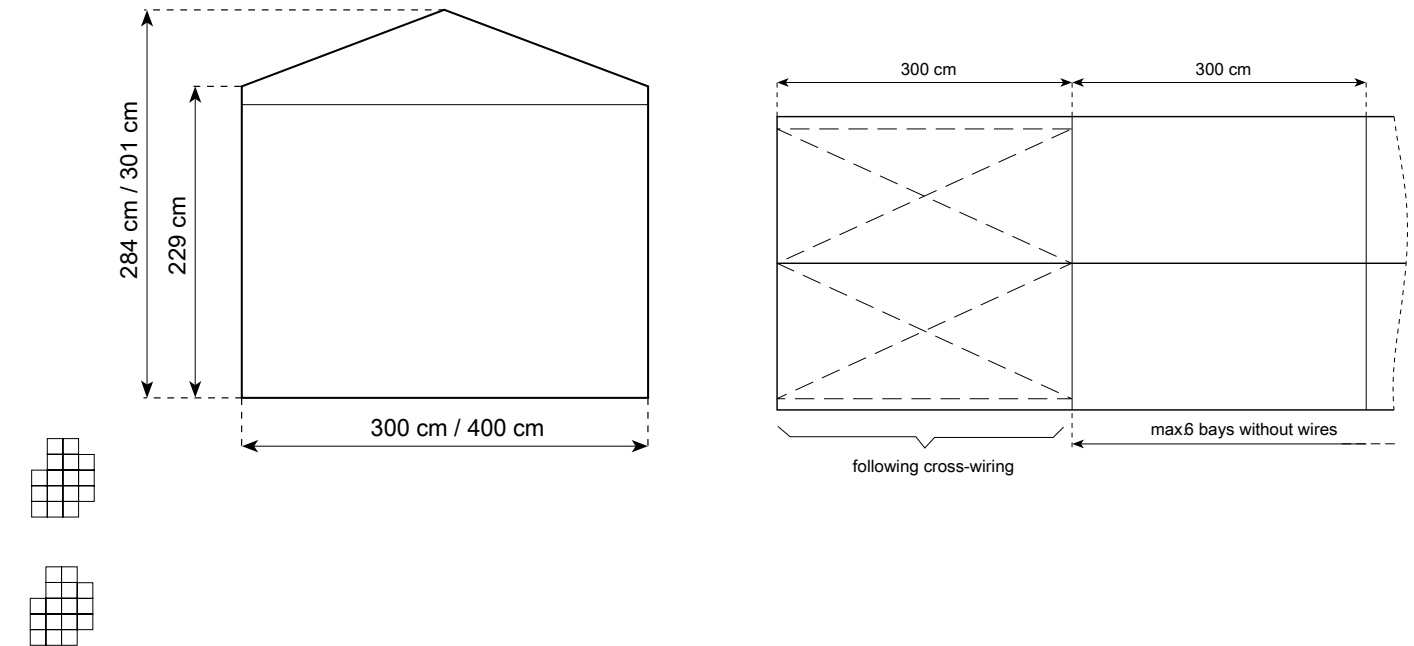

PARTY TENT 600/229/338 & 800/229/374

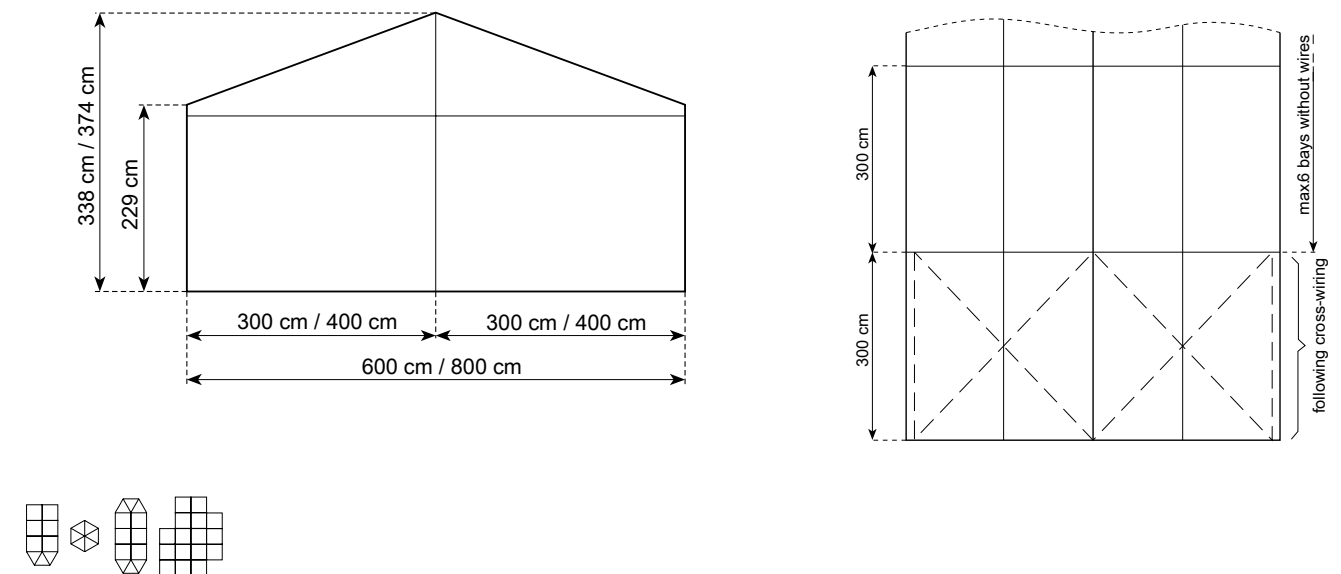

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.