



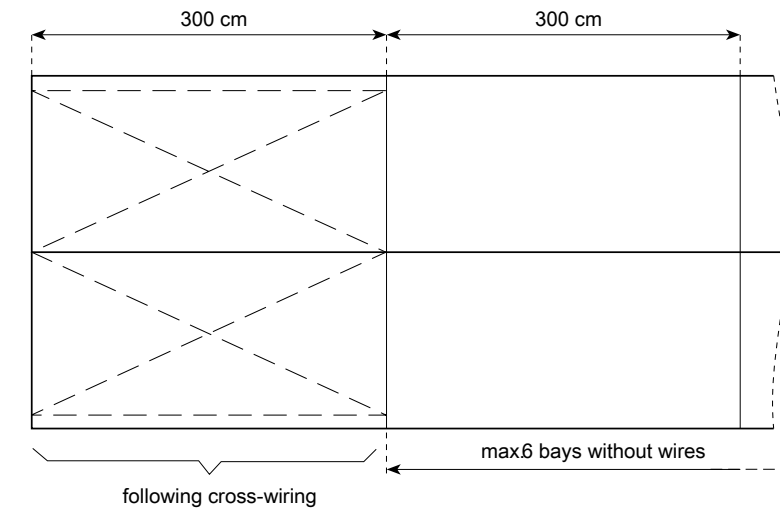

TECHNICAL DATA

STANDARD VERSION		300 cm	400 cm
Span		300 cm	400 cm
Side height		229 cm	229 cm
Ridge height		275 cm	306 cm
Bay distance / grid		300cm	300 cm
Longest component		350 cm	350 cm
Min. setup length		600 cm 1.200 cm with Portalen	600 cm 1.200 cm with Portalen
Main profile		81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm
Gable column		0	0
Corner connections		Stem bolts	Stem bolts
Max. setup length	Expandable with the grid		
Max. wind speed according to EN	80 km/h		
Roof	Roof tarpaulin with bungee tensioning, white		
Special version	Elimination of wind cross-wiring by installation of portals		
Floor	<ul style="list-style-type: none"> · Wood floor with timber or steel-aluminum substructure · Cassette floor · Compact floor 		
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204		

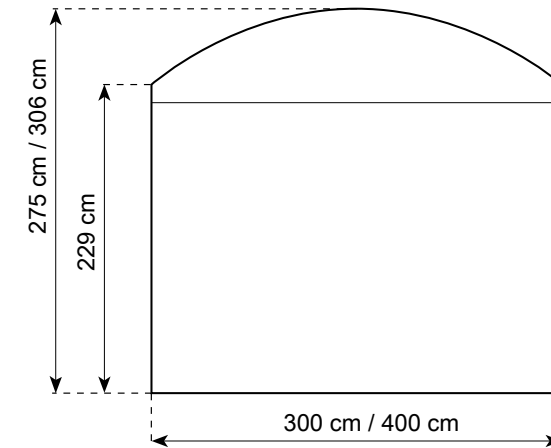

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.