
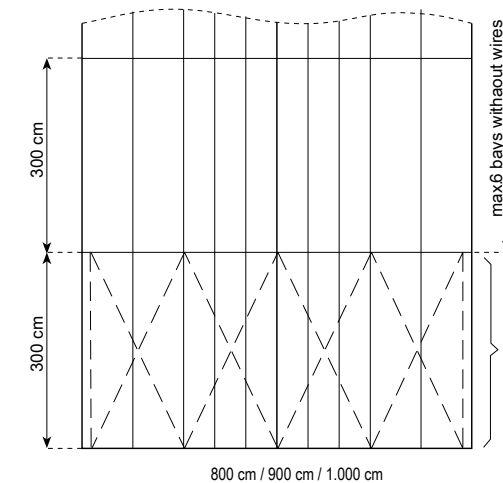


TECHNICAL DATA

STANDARD VERSION

Span	600 cm	800 cm	900 cm	1.000 cm
Side height	229 cm	229 cm	229 cm	229 cm
Ridge height	327 cm	374 cm	397 cm	420 cm
Bay distance / grid	300 cm	300 cm	300 cm	300 cm
Longest component	350 cm	440 cm	500 cm	550 cm
Min. setup length	600 cm 1.200 cm with portals	600 cm 1.200 cm with portals	600 cm 1.200 cm with portals	600 cm 1.200 cm with portals
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	94 x 48 x 3 mm	94 x 48 x 3 mm
Gable column	1	1	2	2
Corner connections	Stem bolts	Stem bolts	Stem bolts	Stem bolts

Max. setup length	Expandable with the grid
Max. wind speed according to EN	80 km/h
Roof	Roof tarpaulin with bungee tensioning, white
Special version	Elimination of wind cross-wiring by installation of portals
Floor	<ul style="list-style-type: none"> Wood floor with timber or steel-aluminum substructure Cassette floor Compact floor
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204

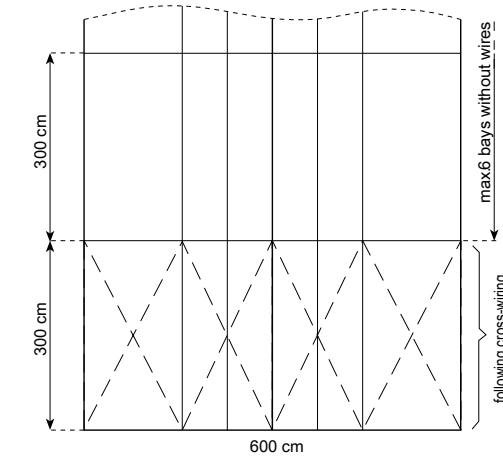

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.