







## TECHNICAL DATA

### STANDARD VERSION

	600 cm	800 cm	900 cm
Span	600 cm	800 cm	900 cm
Side height	229 cm	229 cm	229 cm
Ridge height	338 cm	374 cm	392 cm
High point	488 cm	524 cm	560 cm
Roof pitch	20°	20°	20°
Bay distance / grid	300 cm	300 cm	300 cm
Longest component	321 cm	428 cm	483 cm
Min. setup length	1.200 cm	1.200 cm	1.200 cm
Main profile	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	81 x 48 x 3 mm or optional 94 x 48 x 3 mm	94 x 48 x 3 mm
Gable column	1	1	2
Corner connections	Stem bolts	Stem bolts	Stem bolts

Max. setup length	Expandable with the grid		
Max. wind speed according to EN	80 km/h		
Special version	Elimination of wind cross-wiring by installation of portals		
Attachment option	· Economy extension · ½ Hexagonal at the gable ends	· Economy extension · ½ Hexagonal at the gable ends	· Economy extension
Floor	<ul style="list-style-type: none"> <li>· Wood floor with timber or steel-aluminum substructure</li> <li>· Cassette floor</li> <li>· Compact floor</li> </ul>		
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204		

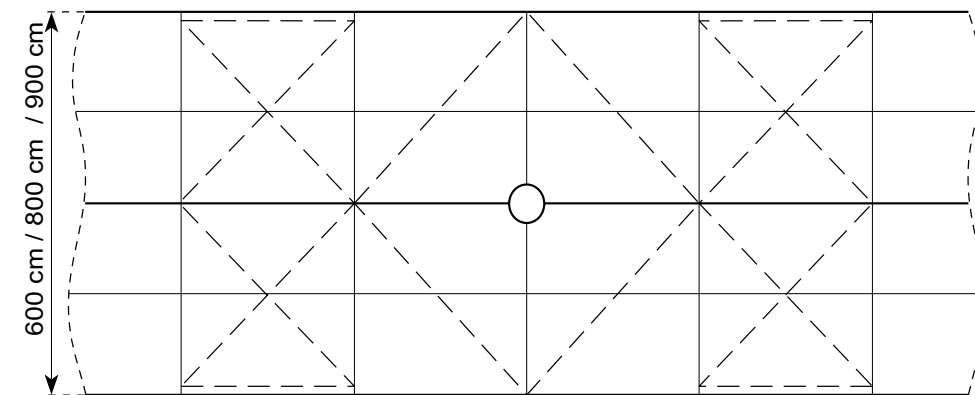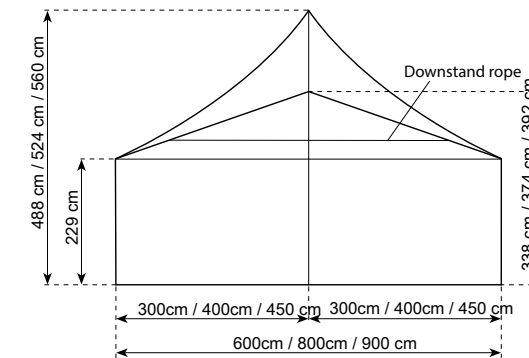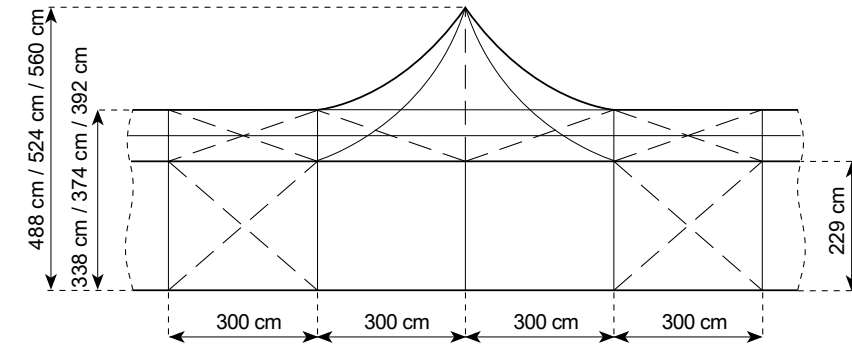

## QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.