





## TECHNICAL DATA

### STANDARD VERSION



Span	1.000 cm	1.500 cm	2.000 cm	2.500 cm	3.000 cm
Side height	400/600 cm	400/600 cm	400/600 cm	400/600 cm	400/600 cm
Ridge height	448/648 cm	469/669 cm	494/694 cm	515/715 cm	534/734 cm
Roof pitch	5°	5°	5°	5°	5°
Bay distance / grid	500 cm	500 cm	500 cm	500 cm	500 cm
Longest component	560/615 cm	813 cm	1.055 cm	1.055 cm	1.055 cm
Min. setup length	1.000 cm	1.000 cm	1.500 cm	1.500 cm	1.500 cm
Main profile	250 x 120 x 5/4 mm	250 x 120 x 5/4 mm	285 x 124 x 7,5/2,5 mm	285 x 124 x 7,5/2,5 mm	285 x 124 x 7,5/2,5 mm
Gable column	1	2	3	4	5

Corner connections	Clevic-plate connection with corner strut
Max. setup length	Expandable with the grid
Max. wind speed according to EN	110 km/h
Floor	<ul style="list-style-type: none"> <li>· Wood floor with timber or steel-aluminum substructure</li> <li>· Cassette floor</li> <li>· Heavy-duty fbor</li> </ul>
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204



### SOLUTION CLASSIC 1.000/400/448 & 1.000/600/648

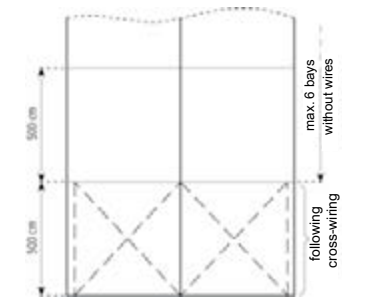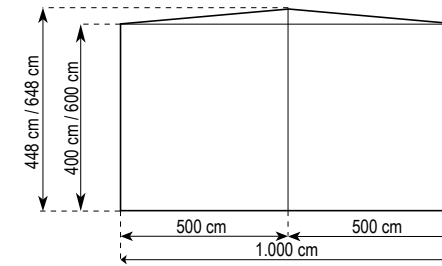



### SOLUTION CLASSIC 1.500/400/469 & 1.500/600/669

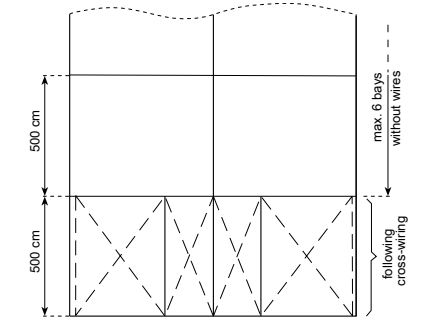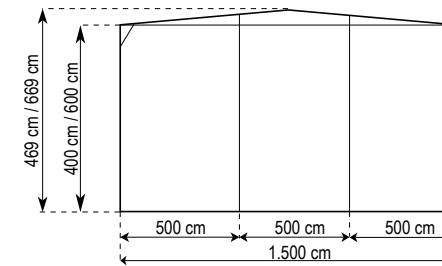



### SOLUTION CLASSIC 2.000/400/494 & 2.000/600/694

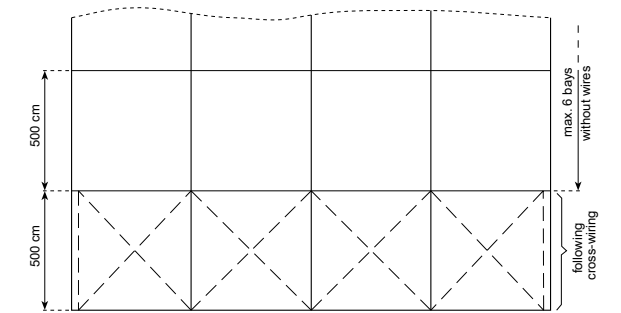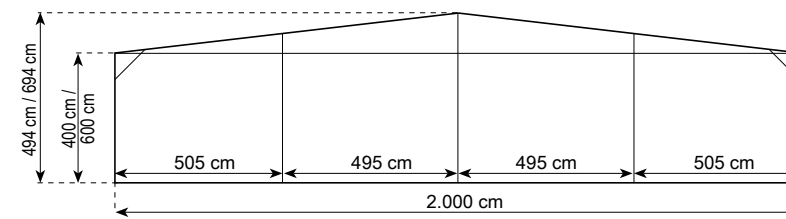

### SOLUTION CLASSIC 2.500/400/515 & 2.500/600/715

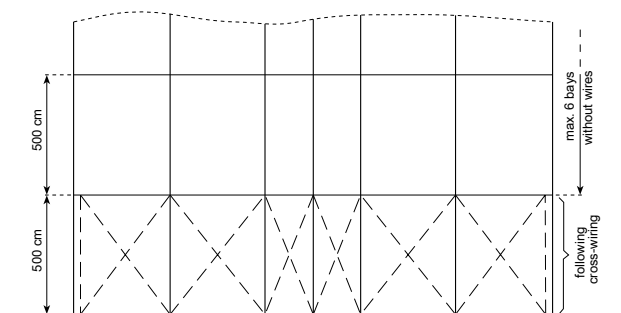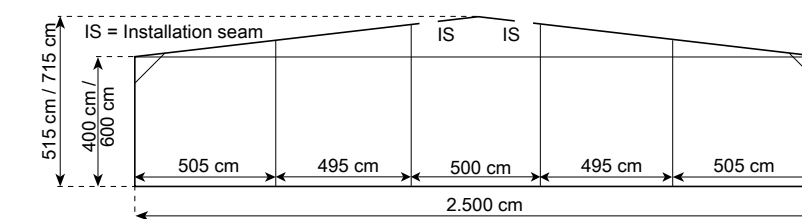

### SOLUTION CLASSIC 3.000/400/534 & 3.000/600/734

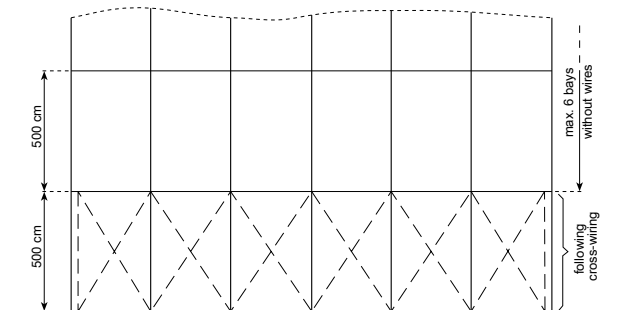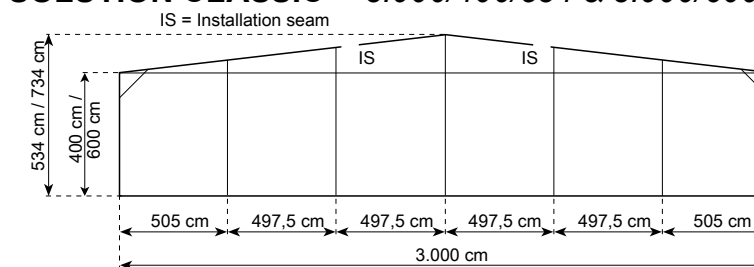

## QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.