



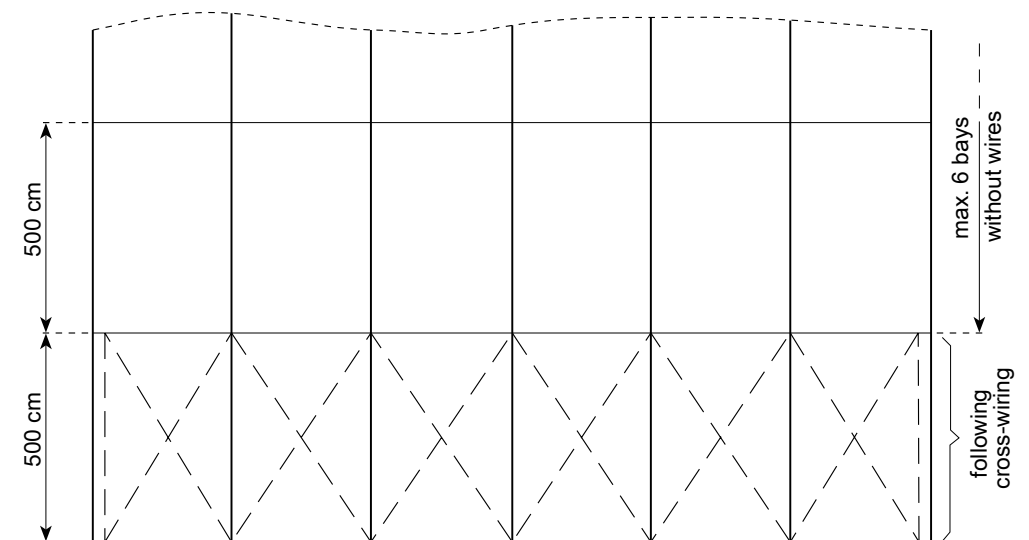

TECHNICAL DATA

STANDARD VERSION

Span	3.000 cm
Side height	1.030 cm
Ridge height	1.162 cm
Roof pitch	5°
Bay distance / grid	500 cm
Longest component	1.055 cm
Min. setup length	5
Main profile	2.000 cm
Gable column	285 x 124 x 7,5/2,5 mm
Corner connections	Clevic-plate connection with corner strut
Max. setup length	Expandable with the grid
Max. wind speed according to EN	110 km/h
Floor	· Wood floor with timber or steel-aluminum substructure · Cassette floor · Heavy-duty floor
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204

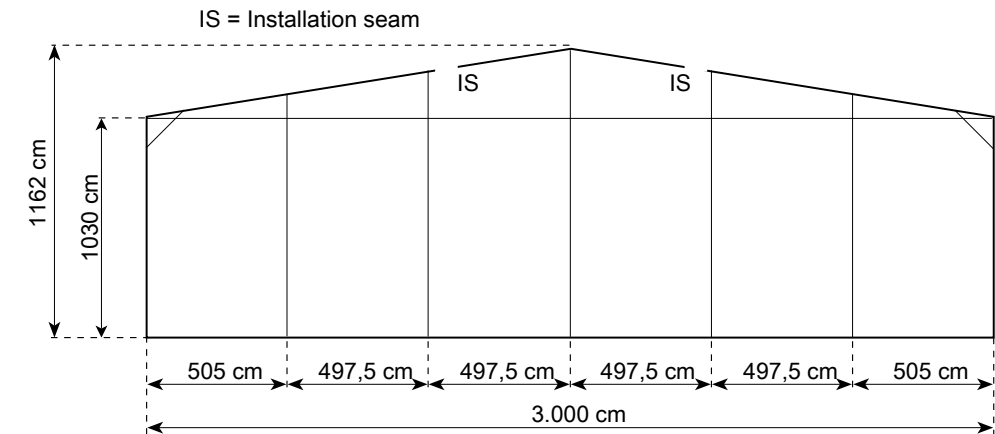

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.