




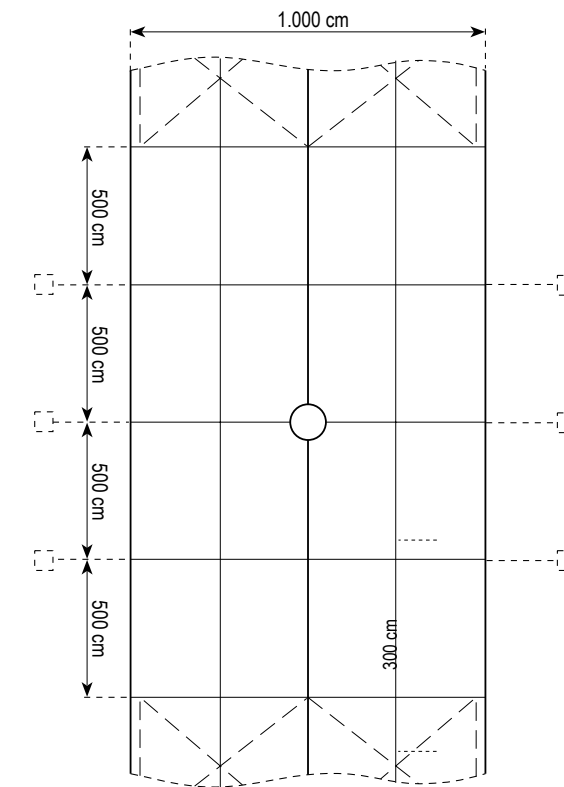

TECHNICAL DATA

STANDARD VERSION

Span	1.000 cm
Side height	240 / 300 cm
Ridge height	422 / 482 cm
High point	672 / 732 cm
Roof pitch	20°
Bay distance / grid	500 cm
Longest component	540 cm
Min. setup length	2.000 cm
Main profile	130 x 70 x 3 mm
Gable column	1
Corner connections	Stem bolts
Max. setup length	Expandable with the grid
Max. wind speed according to EN	100 km/h
Special version	Elimination of the wind cross-wiring by the installation of portals
Attachment options	<ul style="list-style-type: none"> · ½ Octagonal at gable ends · Tents of the Giga series
Floor	<ul style="list-style-type: none"> · Wood floor with timber or steel-aluminum substructure · Cassette floor · Compact floor
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204

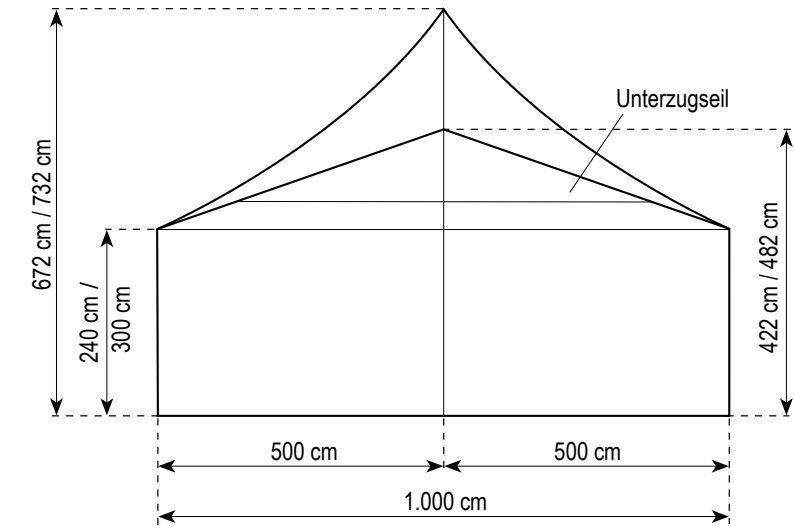

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.