

H-LINE 10.00 - 15.00 m




TECHNICAL DATA

STANDARD VERSION


Span	1.000 cm	1.500 cm
Side height	420 / 520 / 620 / 820 cm	420 / 520 / 620 / 820 cm
Clear height	411 / 511 / 611 / 811 cm	411 / 511 / 611 / 811 cm
Ridge height	594 / 694 / 794 / 994 cm	674 / 774 / 874 / 1.074 cm
Roof pitch	18°	18°
Bay distance / grid	500 cm	500 cm
Longest component	570 / 650 / 750 cm	802 cm
Min. setup length	1.500 cm	1.500 cm
Main profile	252 x 122 x 4 mm	252 x 122 x 4 mm
Gable column	1	2

Max. setup length	Expandable with the grid
Max. wind speed according EN	100 km/h
Snowload	0,85 / 1,31 / 1,48 / 2,00 / 3,00 kN/m ²
Solid cladding	· Trapezoidal sheet metal, galvanized, color-coated, interior protective lacquer · ISO Sandwich elements, galvanized steel sheet on both sides (inside and outside), crimped, PU foam filling
Tarpaulin	ORGATENT AG, PVDF-coated tarpaulin, according to DIN 18204

H-LINE Span 10.00 m

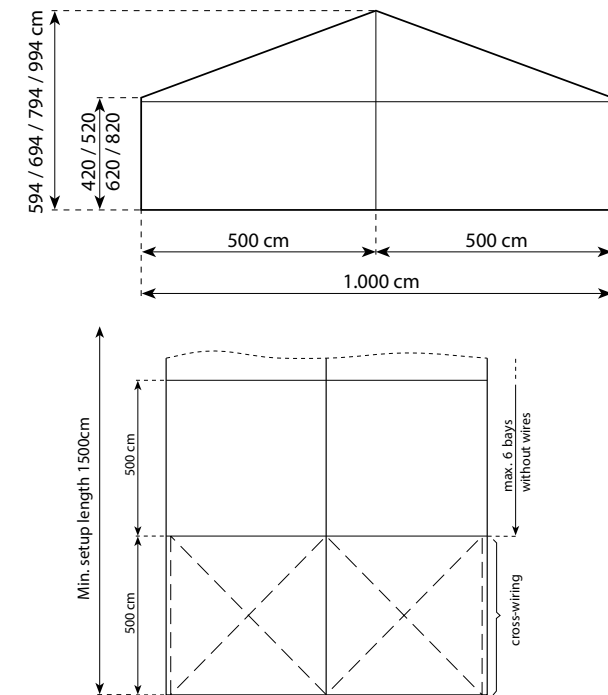

H-LINE Span 15.00 m

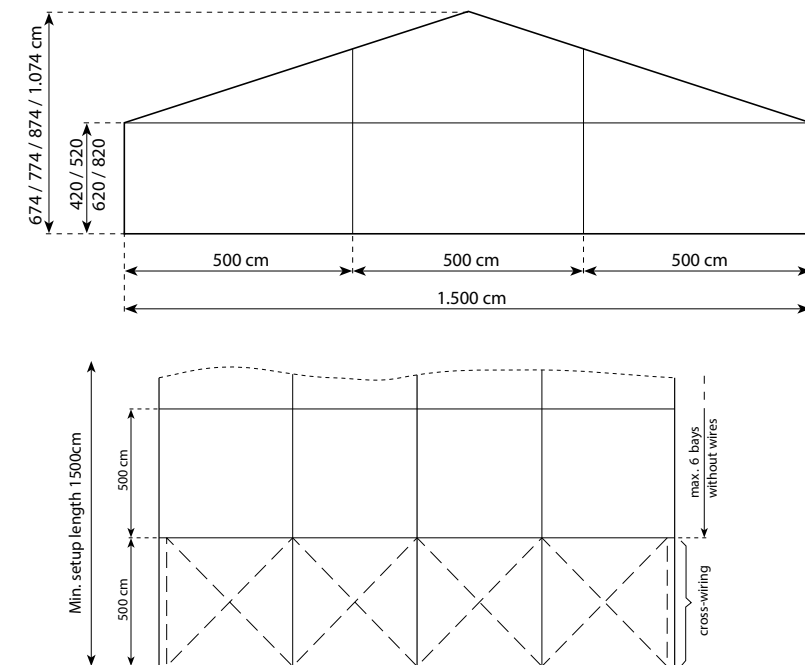

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.