

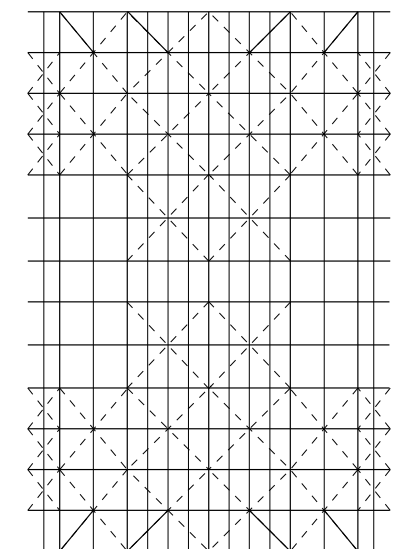
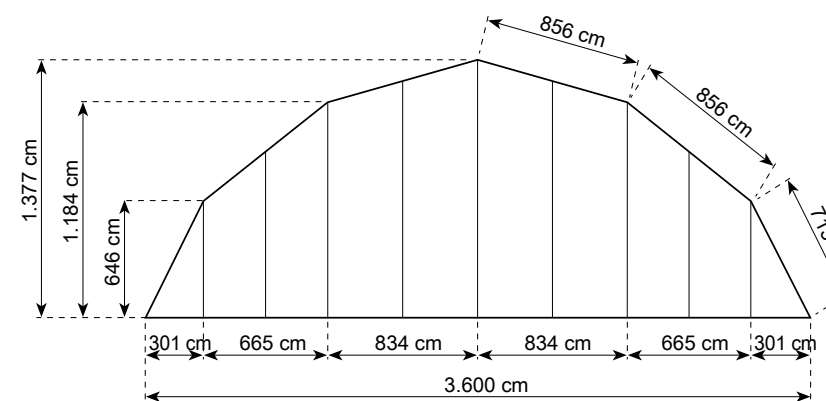
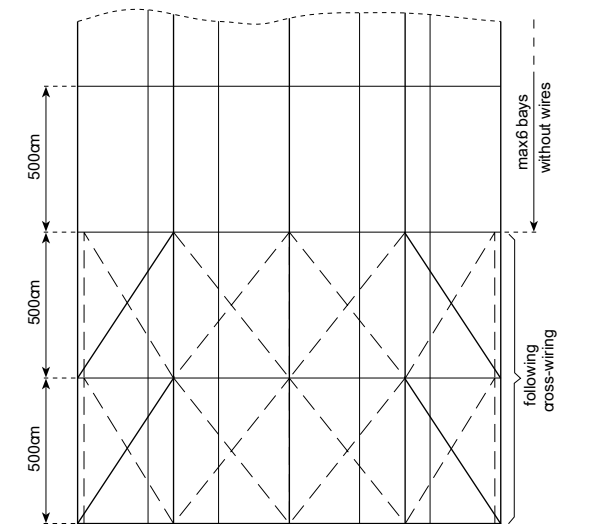
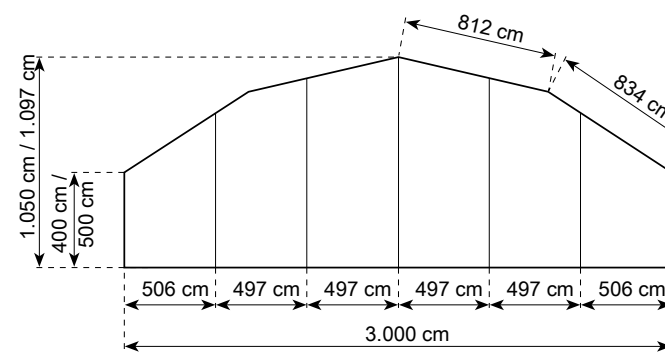


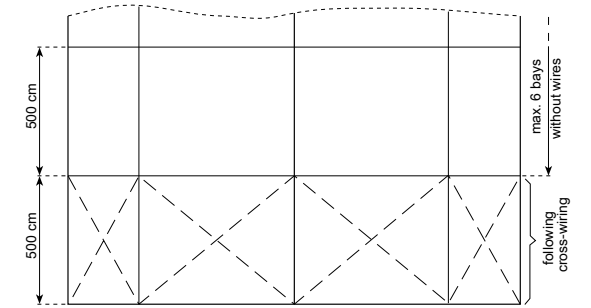

## TECHNICAL DATA

### STANDARD VERSION

Span	1.800 cm	3.000 cm	3.000 cm	3.600 cm
Side height	500 cm	400 cm	500 cm	646 cm
Ridge height	953 cm	1.050 cm	1.097 cm	1.377 cm
Bay distance / grid	500 cm	500 cm	500 cm	400 cm
Longest component	750 cm	840 cm	1.048 cm	1.352 cm
Gable column	3	5	5	9
Main profile	220 x 100 x 4 mm	285 x 124 x 7,5/5,2 mm	285 x 124 x 7,5/5,2 mm	285 x 124 x 7,5/5,2 mm
Corner connections	Stem bolts	Stem bolts	Stem bolts	Stem bolts
Min. setup length	3.090 cm	2.000 cm	2.000 cm	3.200/3.605 cm
Max. setup length	Expandable with the grid			
Max. wind speed according to EN	110 km/h			
Tarpaulin	RÖDER No. 1, PVDF coated tarpaulin, according to DIN 18204			

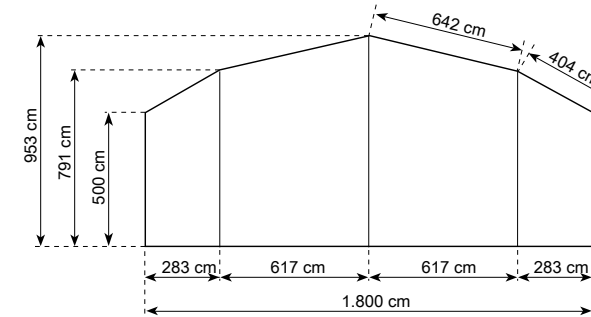

## QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.