

M-LINE 10.00 - 12.50 m




TECHNICAL DATA


STANDARD VERSION

Span	1.000 cm	1.250 cm
Side height	370 / 460 / 520 cm	370 / 460 / 520 cm
Clear height	354 / 444 / 504 cm	354 / 444 / 504 cm
Ridge height	516 / 606 / 666 cm	549 / 639 / 699 cm
Roof pitch	15°	15°
Bay distance / grid	500 cm	500 cm
Min. setup length	1.500 cm	1.500 cm
Main profile	220 x 100 x 4 mm	220 x 100 x 4 mm
Gable column	2	2
Max. setup length	Expandable with the grid	
Max. wind speed according EN	100 km/h	
Snowload	2,00 kN/m ²	
Solid cladding	<ul style="list-style-type: none"> · Trapezoidal sheet metal, strip galvanized, color coated, protective varnish on the inside · ISO sandwich elements, galvanized sheet steel on both sides (inside and outside), face, PU foam filling 	
Tarpaulin	ORGATENT A®VDF-coated tarpaulin, according to DIN 18204	

M-LINE Span 10.00 m

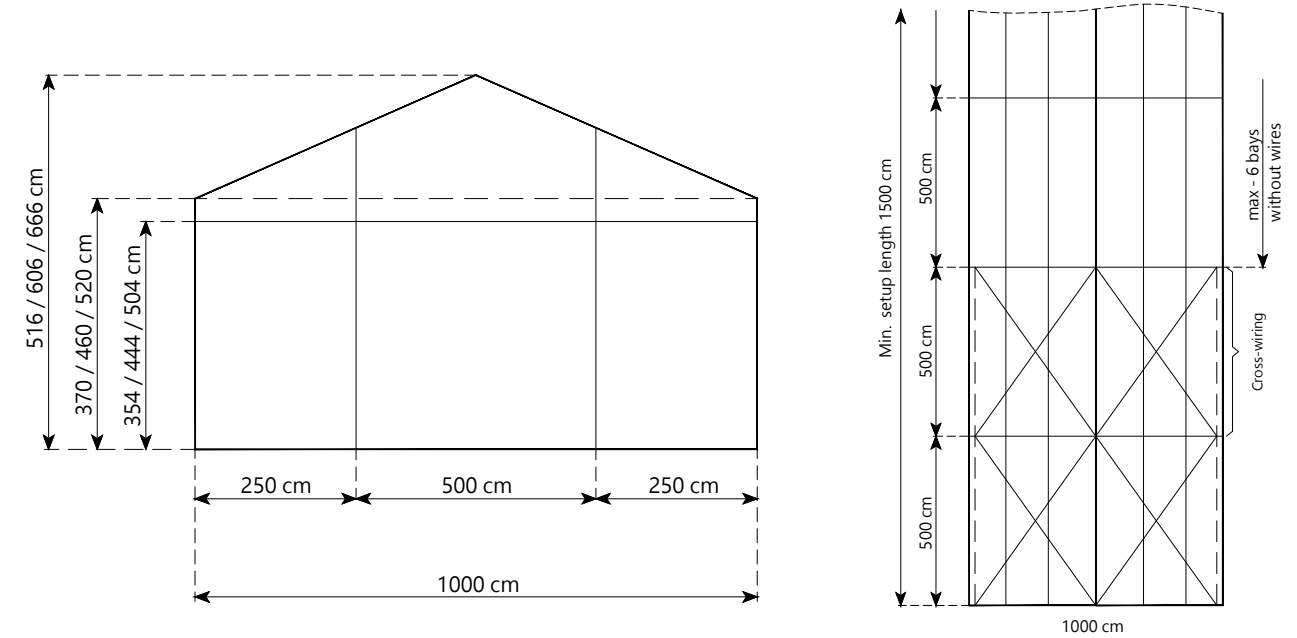

M-LINE Span 12.50 m

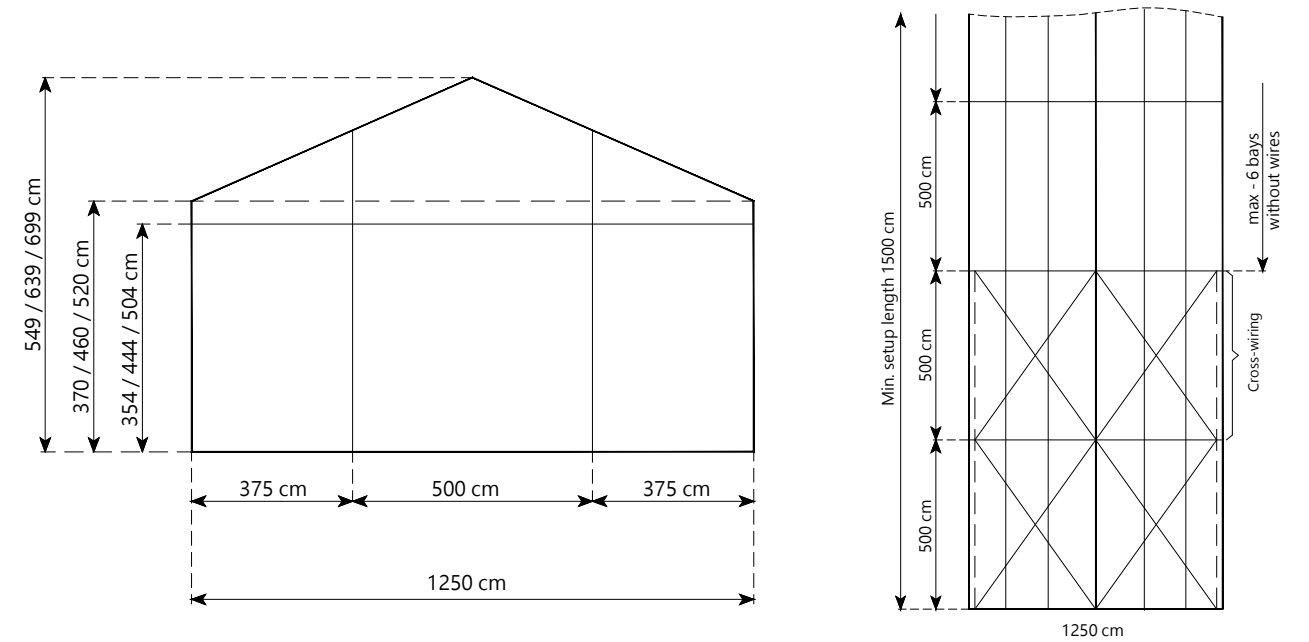

QUESTIONS AND COMMENTS

We have summarized the most important data and dimensions of our standard constructions for you. All information is without guarantee. No liability is assumed for printing and spelling errors. We would be happy to advise you personally about the optimal construction for your needs. Your Orgatent team is at your disposal to answer any questions you may have about intermediates, special features, conversions and other technical data.